# ESD5B5.0S, SZESD5B5.0S

## **ESD Protection Diode**

## Micro-Packaged Diodes for ESD Protection

The ESD5B Series is designed to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size and bi–directional design, it is ideal for use in cellular phones, MP3 players, and portable applications that require audio line protection.

## **Specification Features**

- Low Capacitance 32 pF
- Low Clamping Voltage
- Small Body Outline Dimensions: nom 0.063" x 0.032" (1.6x0.8 mm)
- Low Body Height: nom 0.024" (0.6 mm)
- Reverse Working (Stand-off) Voltage: 5.0 V
- $\bullet\,$  Peak Power up to 50 W @ 8 x 20  $\mu s$  Pulse
- Low Leakage
- Response Time is Typically < 1 ns
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- IEC61000-4-2 Level 4 ESD Protection
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- This is a Pb-Free Device

#### **Mechanical Characteristics**

**CASE:** Void-free, transfer-molded, thermosetting plastic

Epoxy Meets UL 94 V-0

**LEAD FINISH:** 100% Matte Sn (Tin)

**MOUNTING POSITION:** Any

**QUALIFIED MAX REFLOW TEMPERATURE: 260°C** 

Device Meets MSL 1 Requirements

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
IEC 61000-4-2 (ESD) Contact Air		±30 ±30	kV
ESD Voltage Per Human Body Model Per Machine Model		16 400	kV V
Peak Power (Figure 1) Per 8 x 20 μs Waveform Peak Power (Figure 2)Per 10 x 1000 μs Waveform	P <sub>PK</sub>	50 10	W
Total Power Dissipation on FR–5 Board (Note 1) @ T <sub>A</sub> = 25°C	P <sub>D</sub>	200	mW
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1.  $FR-5 = 1.0 \times 0.75 \times 0.62$  in.

See Application Note AND8308/D for further description of survivability specs.



## ON Semiconductor®

www.onsemi.com





SOD-523 CASE 502

#### **MARKING DIAGRAM**



B5 = Specific Device Code

M Date Code

= Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

#### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
ESD5B5.0ST1G	SOD-523 (Pb-Free)	3000 / Tape & Reel
ESD5B5.0ST5G	SOD-523 (Pb-Free)	8000 / Tape & Reel
SZESD5B5.0ST1G	SOD-523 (Pb-Free)	3000 / Tape & Reel
SZESD5B5.0ST5G	SOD-523 (Pb-Free)	8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


## **ESD5B5.0S**, **SZESD5B5.0S**

#### **ELECTRICAL CHARACTERISTICS**

 $(T_A = 25^{\circ}C \text{ unless otherwise noted})$ 

Symbol	Parameter		
I <sub>PP</sub>	Reverse Peak Pulse Current		
V <sub>C</sub>	Clamping Voltage @ IPP		
$V_{RWM}$	Working Peak Reverse Voltage		
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>		
$V_{BR}$	Breakdown Voltage @ I <sub>T</sub>		
I <sub>T</sub>	Test Current		

<sup>\*</sup>See Application Note AND8308/D for detailed explanations of datasheet parameters.



## **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise noted, $V_F = 0.9 \text{ V}$ Max. @ $I_F = 10 \text{ mA}$ for all types)

	V <sub>RWM</sub> (V)	I <sub>R</sub> (μΑ) @ V <sub>RWM</sub>	V <sub>BR</sub> (V (Not		Ι <sub>Τ</sub>	C (pF) @ V <sub>R</sub> = 0 V, f = 1 MHz	V <sub>C</sub>
Device*	Max	Max	Min	Max	mA	Тур	Per IEC61000-4-2 (Note 3)
ESD5B5.0ST1G/T5G, SZESD5B5.0ST1G	5.0	1.0	5.8	7.8	1.0	32	Figures 1 and 2 See Below

<sup>\*</sup>Other voltages available upon request.

- 2.  $V_{BR}$  is measured with a pulse test current  $I_T$  at an ambient temperature of 25°C.
- 3. For test procedure see Figures 3 and 4 and Application Note AND8307/D.




Figure 1. ESD Clamping Voltage Screenshot Positive 8 kV Contact per IEC 61000-4-2




Figure 2. ESD Clamping Voltage Screenshot Negative 8 kV Contact per IEC 61000-4-2

## ESD5B5.0S, SZESD5B5.0S

### IEC 61000-4-2 Spec.

<del>-</del>					
Level	Test Volt- age (kV)	First Peak Current (A)	Current at 30 ns (A)	Current at 60 ns (A)	
1	2	7.5	4	2	
2	4	15	8	4	
3	6	22.5	12	6	
4	8	30	16	8	

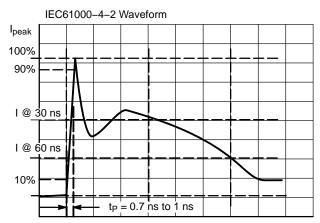


Figure 3. IEC61000-4-2 Spec

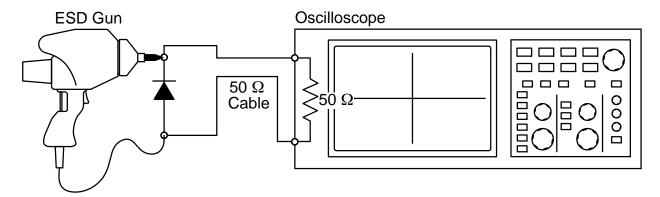



Figure 4. Diagram of ESD Test Setup

The following is taken from Application Note AND8308/D – Interpretation of Datasheet Parameters for ESD Devices.

#### **ESD Voltage Clamping**


For sensitive circuit elements it is important to limit the voltage that an IC will be exposed to during an ESD event to as low a voltage as possible. The ESD clamping voltage is the voltage drop across the ESD protection diode during an ESD event per the IEC61000–4–2 waveform. Since the IEC61000–4–2 was written as a pass/fail spec for larger


systems such as cell phones or laptop computers it is not clearly defined in the spec how to specify a clamping voltage at the device level. ON Semiconductor has developed a way to examine the entire voltage waveform across the ESD protection diode over the time domain of an ESD pulse in the form of an oscilloscope screenshot, which can be found on the datasheets for all ESD protection diodes. For more information on how ON Semiconductor creates these screenshots and how to interpret them please refer to AND8307/D.




SOD-523 CASE 502-01 ISSUE E


**DATE 28 SEP 2010** 







## **RECOMMENDED SOLDERING FOOTPRINT\***




\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- CONTROLLING DIMENSION: MILLIMETERS.
  MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PRO-TRUSIONS, OR GATE BURRS.

	MILLIMETERS				
DIM	MIN	NOM	MAX		
Α	0.50	0.60	0.70		
b	0.25	0.30	0.35		
С	0.07	0.14	0.20		
D	1.10	1.20	1.30		
E	0.70	0.80	0.90		
HE	1.50	1.60	1.70		
L	0.30 REF				
L2	0.15	0.20	0.25		

## **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

STYLE 2: NO POLARITY STYLE 1: PIN 1. CATHODE (POLARITY BAND) 2. ANODE

DOCUMENT NUMBER:	98AON11524D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOD-523		PAGE 1 OF 1	

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative