

Rollover Detection In-Plane Gyroscope

Data Sheet ADXRS910

FEATURES

High performance, in-plane roll rate gyroscope
Temperature compensated, high precision offset and
sensitivity performance

2°/sec rms maximum gyroscope noise Serial port interface (SPI) digital output with 16-bit data word

<20 mA quiescent current consumption

3.3 V and 5 V operation

-40°C to +105°C temperature range

16-lead SOIC_CAV surface-mount package for in-plane roll rate sensing

AEC-Q100 qualified for automotive applications

APPLICATIONS

Rollover detection


GENERAL DESCRIPTION

The ADXRS910 is a high performance in-plane gyroscope, designed for automotive rollover detection applications. The ADXRS910 also has an internal temperature sensor that is used to compensate offset and sensitivity performance, providing excellent stability over the -40° C to $+105^{\circ}$ C temperature range.

The gyroscope provides a full-scale range of ±300°/sec with a sensitivity of 80 LSB/°/sec. Its resonating disk sensor structure enables angular rate measurement around an in-plane axis. The –3 dB filter corner frequency can be selected to be 27.6 Hz, 51.3 Hz, 109 Hz, or 196.8 Hz. The sensor data output from the device is a 16-bit, twos complement word contained in a 32-bit SPI transaction. SPI communications are compatible up to 10 MHz

The ADXRS910 is available in a 16-lead inverted SOIC package. The ADXRS910 is specified to operate at 3.3 V and 5 V, with less than 20 mA of current consumption. Its specifications are valid over the -40° C to $+105^{\circ}$ C temperature range.

FUNCTIONAL BLOCK DIAGRAM

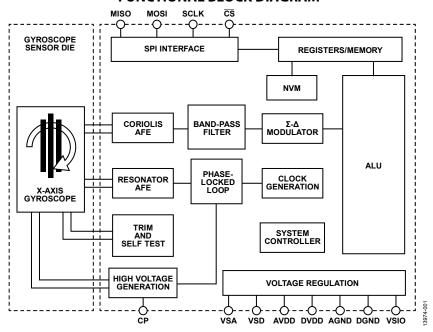

Fiaure 1.

For more information about the ADXRS910, contact the Analog Devices, Inc., Customer Interaction Center at www.analog.com/technical_support to connect with a technical support specialist.

ADXRS910 Data Sheet

NOTES

